

## Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	220Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 32.2 Kg/71.00Lbs (Tolerance ± 2%)
Internal Resistance	Approx. 1.5 mΩ
Terminal	F12(M8)
Max. Discharge Current	2200A (5 sec)
Cold Cranking Ampere(CCA)	1000A
Cranking Ampere(CA)	1207A
Maximum Charging Current	66.0A
Reserve Capacity	470min@25A to 1.75V/Cell(25°C) 115min@75A to 1.75V/Cell(25°C)
Reference Capacity	C10 202.0AH C20 220.0AH
Float Charging Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.30 V~7.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



The series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the series battery offers reliable performance in high load situations and could provide competitive cycle performance. Suitable for Electric Vehicle and Golf cart; Industrial equipment, Floor machines, Forklifts, Aerial lifts, and Robotics; Marine, RV, and no-idle solutions; Mobility and Medical equipment; and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001







MH 60419



G4M20206-0910-E-16

## Dimensions



F12 TERMINAL

Length	306±2mm (12.05inches)
Width	169±2mm (6.65 inches)
Height	220±2mm (8.66 inches)
Total Height	227±2mm (8.94 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	382.0	218.5	132.4	78.70	56.20	44.40	37.00	26.20	21.70	11.40
1.65V	370.6	214.0	129.9	77.40	55.30	43.80	36.60	25.90	21.40	11.30
1.70V	355.6	207.9	126.6	75.60	54.20	43.00	36.00	25.50	21.10	11.20
1.75V	335.4	199.6	122.1	73.20	52.60	41.80	35.10	24.90	20.70	11.00
1.80V	308.2	188.3	115.8	69.80	50.40	40.30	33.90	24.20	20.20	10.70
1.85V	270.8	172.3	107.0	65.00	47.30	38.00	32.20	23.10	19.40	10.30

### Constant Power Discharge Characteristics : W(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	667.9	396.9	247.6	149.2	107.3	85.20	71.40	51.10	42.60	22.50
1.65V	661.5	394.4	245.5	147.8	106.3	84.50	70.90	50.70	42.20	22.30
1.70V	640.2	385.4	240.0	144.8	104.4	83.10	69.80	50.00	41.70	22.10
1.75V	612.7	373.9	232.6	140.8	101.8	81.20	68.40	49.00	40.90	21.70
1.80V	571.1	356.3	221.8	135.0	98.00	78.50	66.40	47.70	39.90	21.20
1.85V	508.8	329.2	206.3	126.4	92.30	74.40	63.20	45.60	38.30	20.50

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


**Cycle Life in Relation to Depth of Discharge**

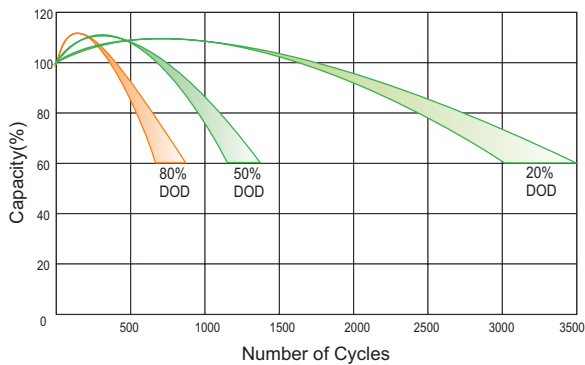


**Storage Characteristics**

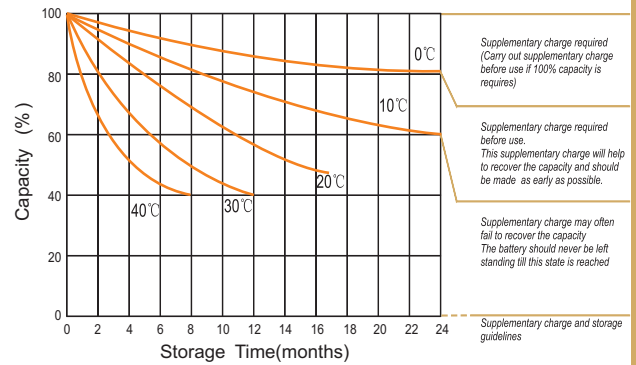

**Charge Characteristic Curve for Cycle Use(IUUU)**

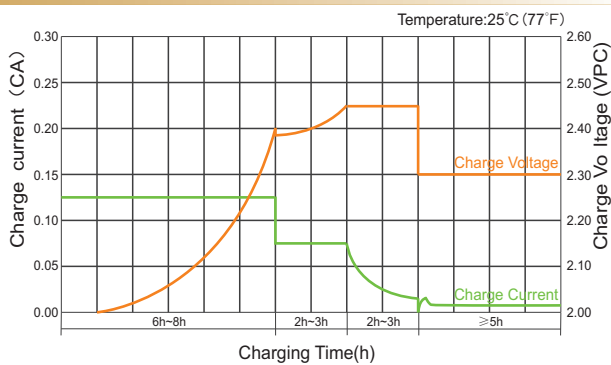

**Discharge Characteristics Curve**

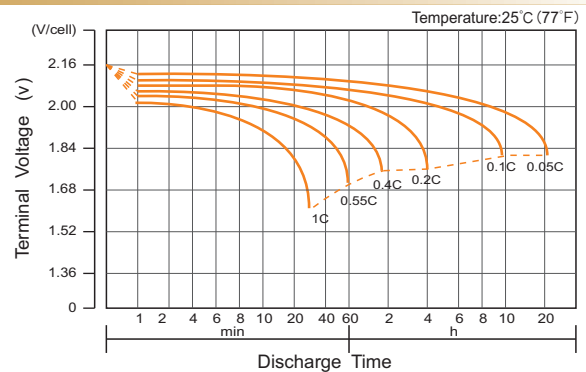

## CHARGE VOLTAGES

Charge Stage	Battery Voltage			
	12V	24V	36V	48V
Bulk	14.6	29.2	43.8	58.4
Absorption	14.6	29.2	43.8	58.4
Float	13.6	27.2	40.8	54.4
TC Factor: (-3mV/°C/cell) or (-4mV/°C/cell)				

## Capacity Factors With Different Temperature

Battery Type	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL 6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
Battery 2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM 6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
Battery 2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final D ischarge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

## Maintenance & Cautions

### Cycle Service

- ▶ Avoid battery overcharge, especially in series connection use.
- ▶ Charge with recommended voltage. Ensure battery fully recharges. In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ▶ Effect of temperature on cycle charge voltage: -4mV/°C / Cell
- ▶ The length of cycle service will be affected by depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged. Generally speaking, the most important factor is depth of discharge.

### Float Service:

- ▶ Every month, recommend inspection of every battery's voltage.
  - ▶ Every three months, recommend a one time equalization charge.
- Equalization charge method:
- Discharge - 100% rate capacity discharge
- Charge - Max. current 0.3C, constant voltage 2.4-2.45V/Cell charge 24h.
- ▶ Effect of temperature on float charge voltage: -3mV/°C/Cell.
  - ▶ Length of service life will be affected by the number of discharge cycles, depth of discharge, ambient temperature, and charging voltage