

Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	250Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 35.3 Kg/77.84Lbs (Tolerance ± 2%)
Internal Resistance	Approx. 2.0 mΩ
Terminal	F14(M8)
Max. Discharge Current	2250A (5 sec)
Cold Cranking Ampere(CCA)	1100A
Cranking Ampere(CA)	1220A
Maximum Charging Current	67.5A
Reserve Capacity	570min@25A to 1.75V/Cell(25°C) 138min@75A to 1.75V/Cell(25°C)
Reference Capacity	C10 225.2AH C20 250.0AH
Float Charging Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.30 V~7.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



The series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the series battery offers reliable performance in high load situations and could provide competitive cycle performance. Suitable for Electric Vehicle and Golf cart; Industrial equipment, Floor machines, Forklifts, Aerial lifts, and Robotics; Marine, RV, and no-idle solutions; Mobility and Medical equipment; and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001







MH 60419



G4M20206-0910-E-16

Dimensions



F14 TERMINAL

Length	260±2mm (10.2inches)
Width	180±2mm (7.09inches)
Height	263±2mm (10.4inches)
Total Height	270±2mm (10.6inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	804.4	592.2	437.0	255.8	146.3	89.21	60.17	50.03	39.87	28.77	23.41	13.24
5.00V	781.1	563.5	428.1	251.4	143.3	88.54	59.71	49.80	39.62	28.54	23.18	12.99
5.10V	758.0	543.6	421.3	246.7	139.7	87.87	58.59	49.57	39.37	28.30	22.95	12.75
5.25V	680.6	501.6	401.2	244.8	136.8	87.20	57.22	49.10	38.88	28.07	22.73	12.50
5.40V	614.3	457.4	369.8	240.7	132.8	85.63	56.28	47.94	38.59	27.60	22.52	12.37
5.55V	524.6	408.8	331.7	225.3	128.0	81.83	55.30	45.63	37.62	26.43	22.26	11.87

Constant Power Discharge Characteristics : W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30M1N	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	4243	3185	2418	1464	845.0	529.5	357.8	298.2	238.8	171.8	140.4	79.45
5.00V	4160	3088	2379	1446	843.0	527.8	356.2	297.8	237.1	170.9	139.6	77.97
5.10V	4112	3006	2361	1433	836.5	524.6	350.8	297.1	236.3	169.8	138.3	76.48
5.25V	3744	2799	2289	1440	819.9	523.0	343.0	294.4	234.0	168.4	137.0	75.00
5.40V	3410	2580	2115	1417	796.8	515.1	338.9	287.7	231.5	165.6	135.6	74.24
5.55V	2995	2355	1942	1334	768.7	492.9	333.1	273.8	226.1	158.6	133.9	71.23

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


Cycle Life in Relation to Depth of Discharge

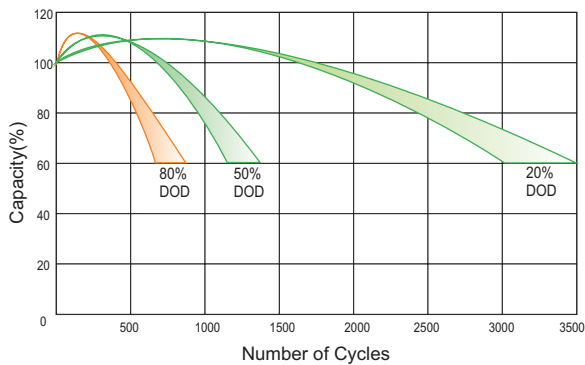


Storage Characteristics

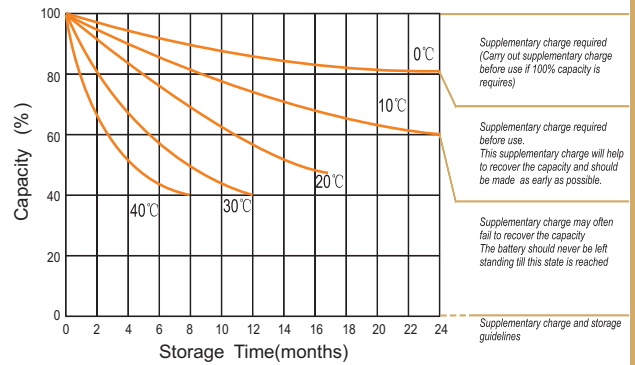

Charge Characteristic Curve for Cycle Use(IUUU)

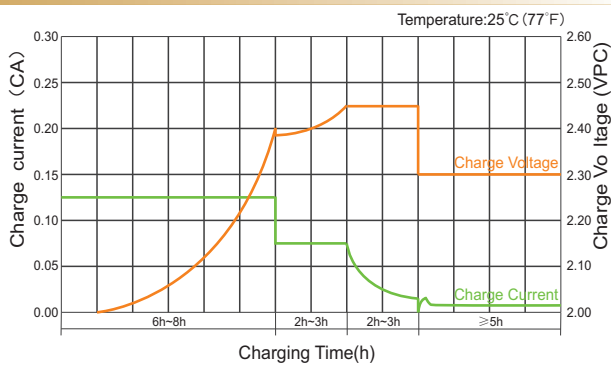

Discharge Characteristics Curve

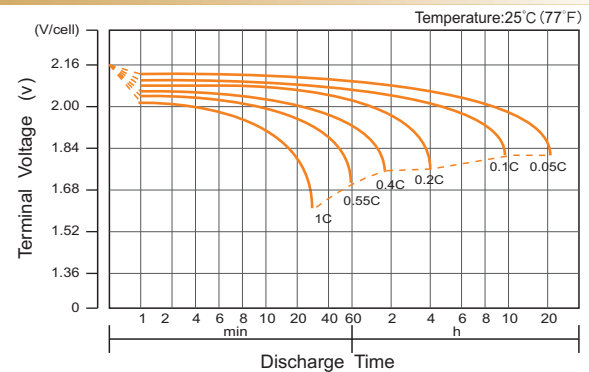

CHARGE VOLTAGES

Charge Stage	Battery Voltage			
	12V	24V	36V	48V
Bulk	14.6	29.2	43.8	58.4
Absorption	14.6	29.2	43.8	58.4
Float	13.6	27.2	40.8	54.4
TC Factor: (-3mV/°C/cell) or (-4mV/°C/cell)				

Capacity Factors With Different Temperature

Battery Type	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL 6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
Battery 2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM 6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
Battery 2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final D ischarge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤0.2C	0.2C < (A) < 1.0C	(A) ≥1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Maintenance & Cautions

Cycle Service

- ▶ Avoid battery overcharge, especially in series connection use.
- ▶ Charge with recommended voltage. Ensure battery fully recharges. In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ▶ Effect of temperature on cycle charge voltage: -4mV/°C / Cell
- ▶ The length of cycle service will be affected by depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged. Generally speaking, the most important factor is depth of discharge.

Float Service:

- ▶ Every month, recommend inspection of every battery's voltage.
 - ▶ Every three months, recommend a one time equalization charge.
- Equalization charge method:
- Discharge - 100% rate capacity discharge
- Charge - Max. current 0.3C, constant voltage 2.4-2.45V/Cell charge 24h.
- ▶ Effect of temperature on float charge voltage: -3mV/°C/Cell.
 - ▶ Length of service life will be affected by the number of discharge cycles, depth of discharge, ambient temperature, and charging voltage